1 DELCO E39/E39A IROM MPC5566 BAM GM

1.1 PLUGIN 1726

DELCO E39

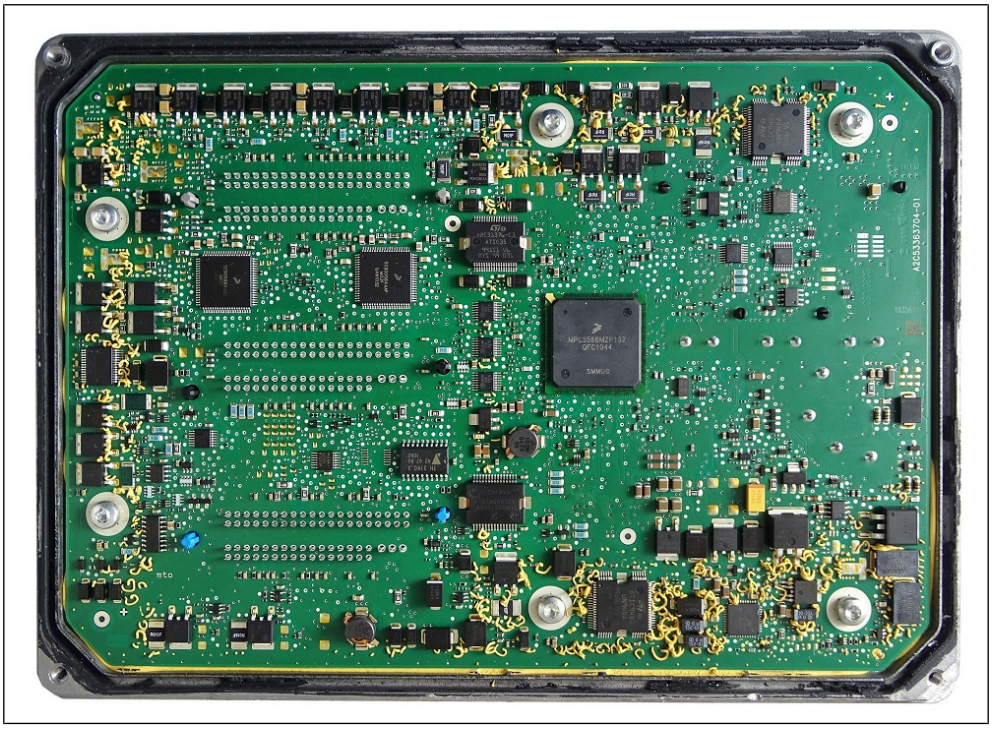

DELCO E39_E39A IROM MPC5566 BAM GM

DELCO E39A

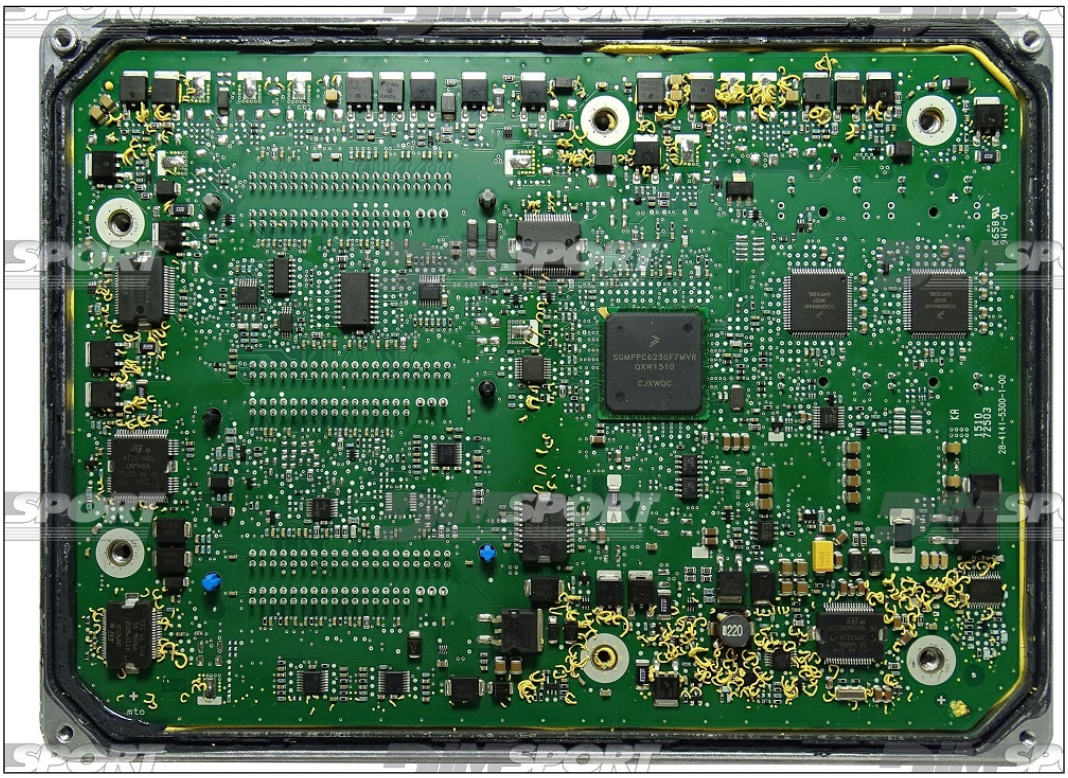

1.2 CONNECTIONS

1.2.1 DIRECT CONNECTION

ATTENTION

After making all the connections, connect a stabilized power supply to the New Trasdata and make sure that the POWER LED (red) is on.

To communicate correctly with the control unit, it is necessary to use the F32GN037C/D cable.

WIRE COLOUR		DESCRIPTION
	Red	**+12 V**
	Black	**GND**
	Green	**CAN L**
	White	**CAN H**
	Grey	**BOOT**
	Blue	**CNF1**

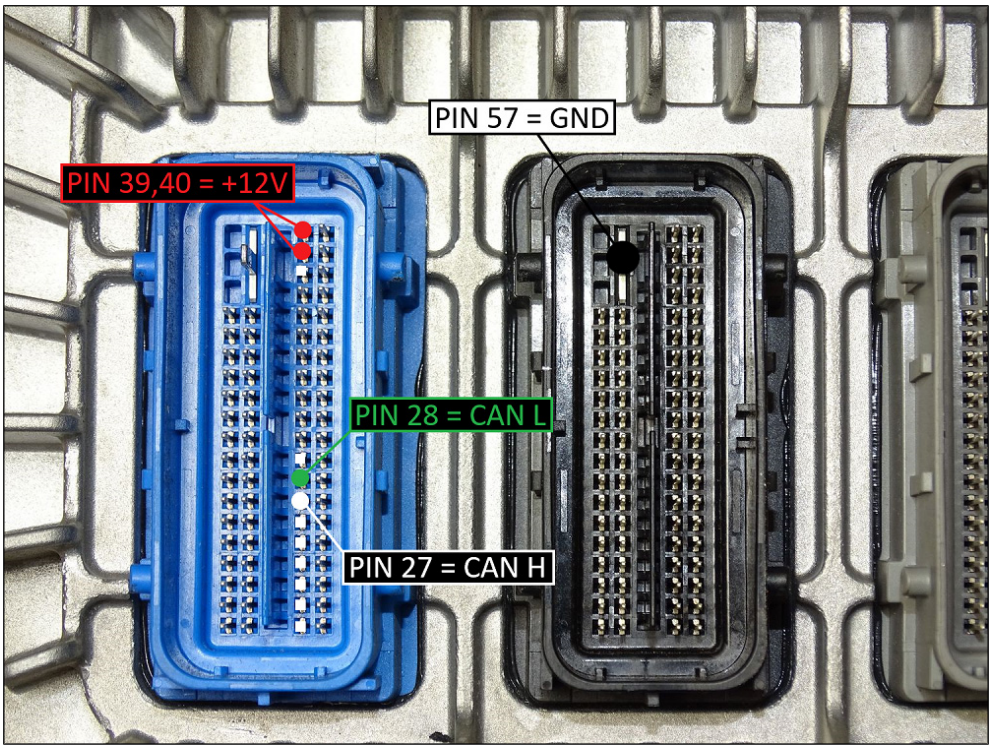

DELCO E39

Connect the BOOT and CNF1 pins to the grey and blue wires of the cable F32GN037C/D .

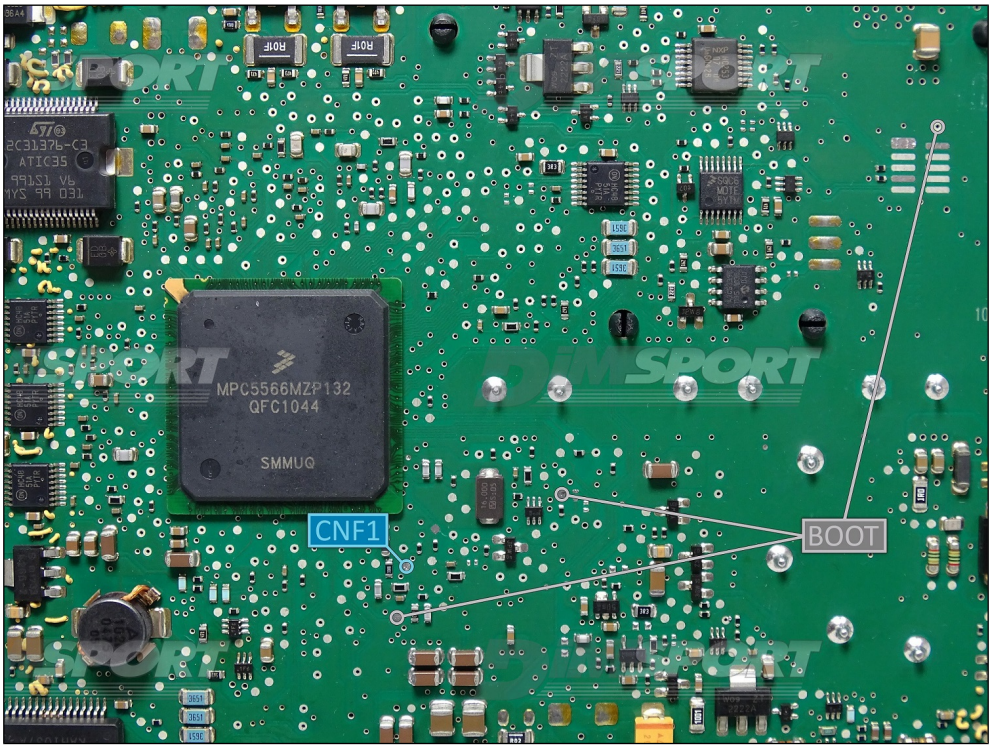

DELCO E39A
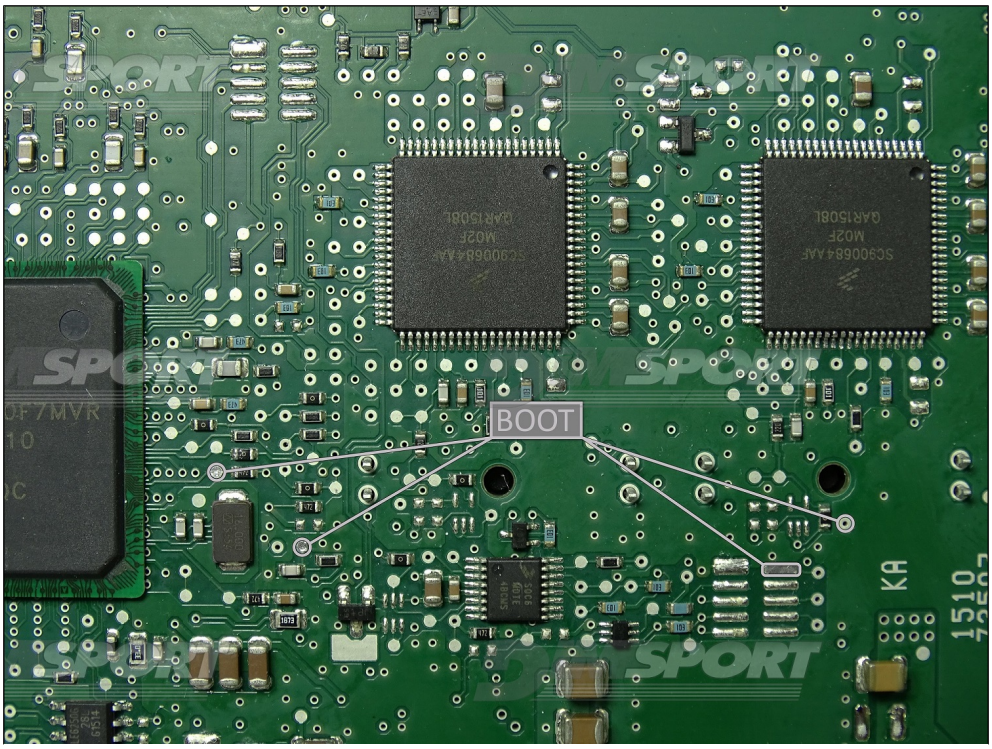
Connect the BOOT pins to the grey wires of the cable F32GN037C/D .