


1 BOSCH DCU15 DAF/IVECO

1.1 PLUGIN 1032

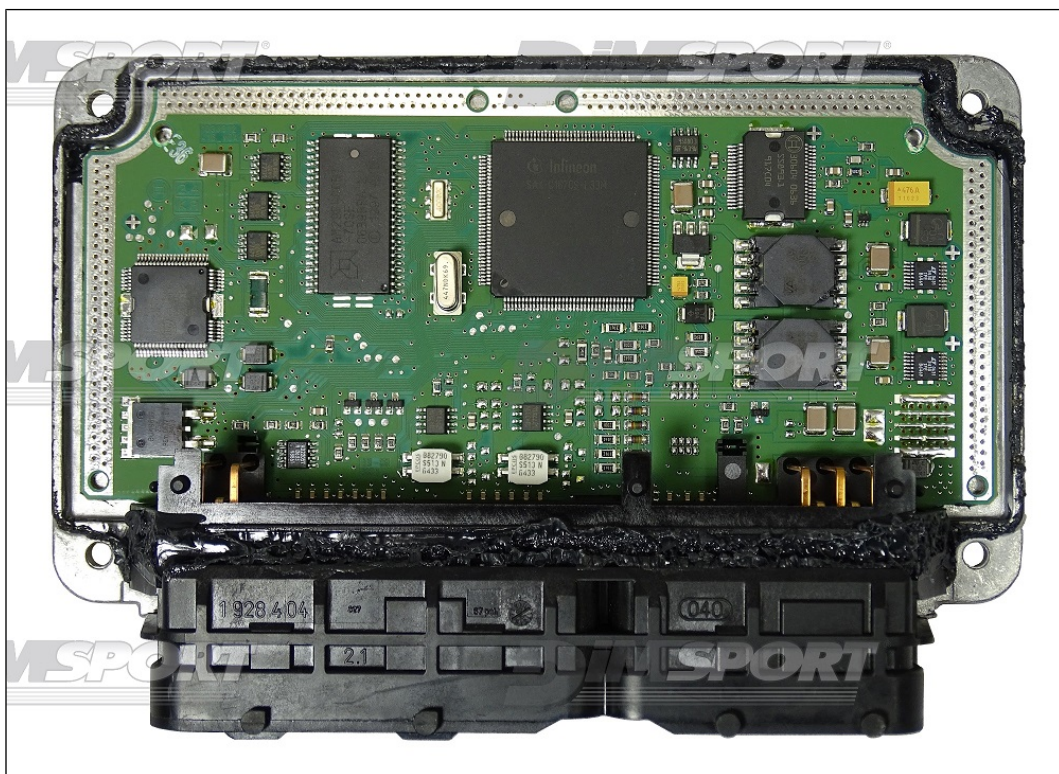

1.2 CONNECTIONS

1.2.1 DIRECT CONNECTION



ATTENTION

After making all the connections, connect a stabilized power supply to the New Trasdata and make sure that the POWER LED (red) is on.


To communicate correctly with the control unit, it is necessary to use the F32GN037C/D cable.

→ ANALOG PORT

F32GN037C/D



WIRE COLOUR		DESCRIPTION
Red	Red	+12 V
Black	Black	GND
Grey	Grey	BOOT

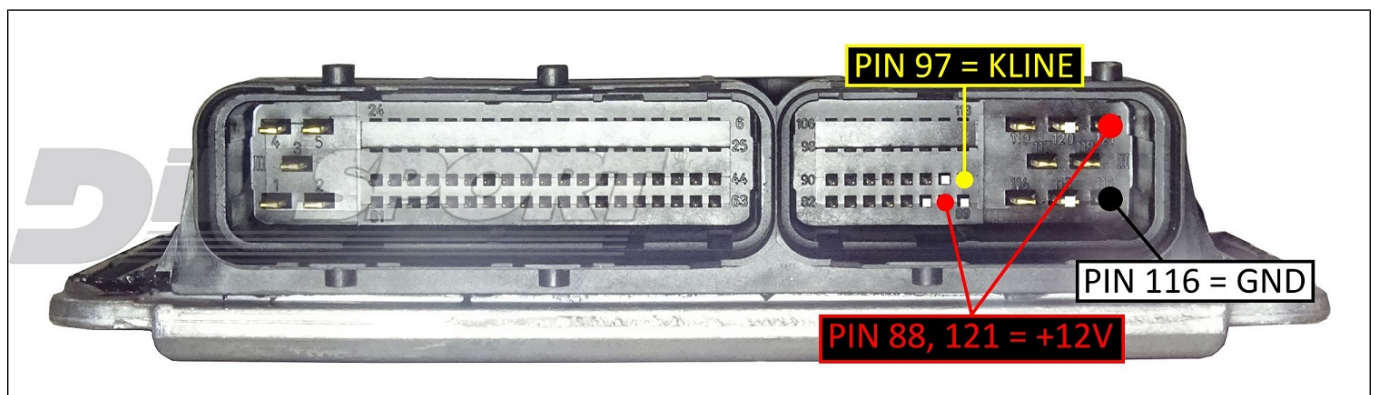

Connect the BOOT pin to the grey wire of the cable F32GN037C/D .

