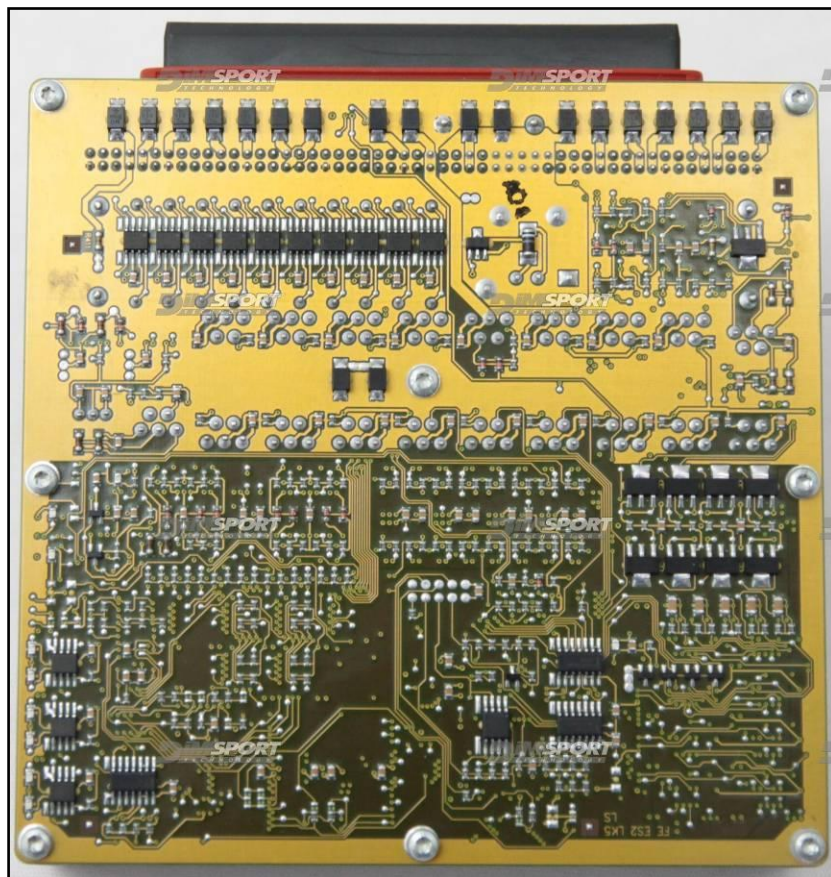


AGCO GEARBOX ST10F269 XROM FENDT

plugin 366-811



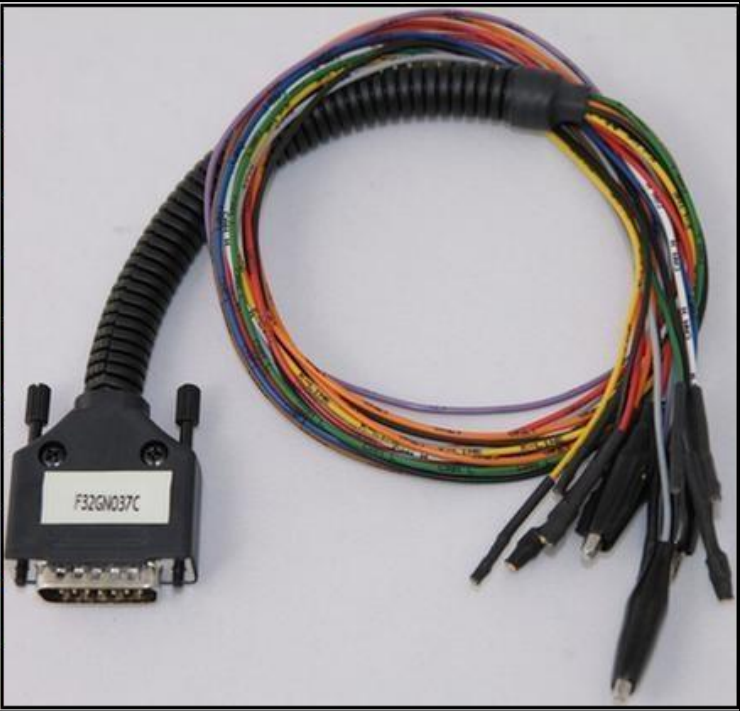
AGCO GEARBOX ST10F269 XROM FENDT

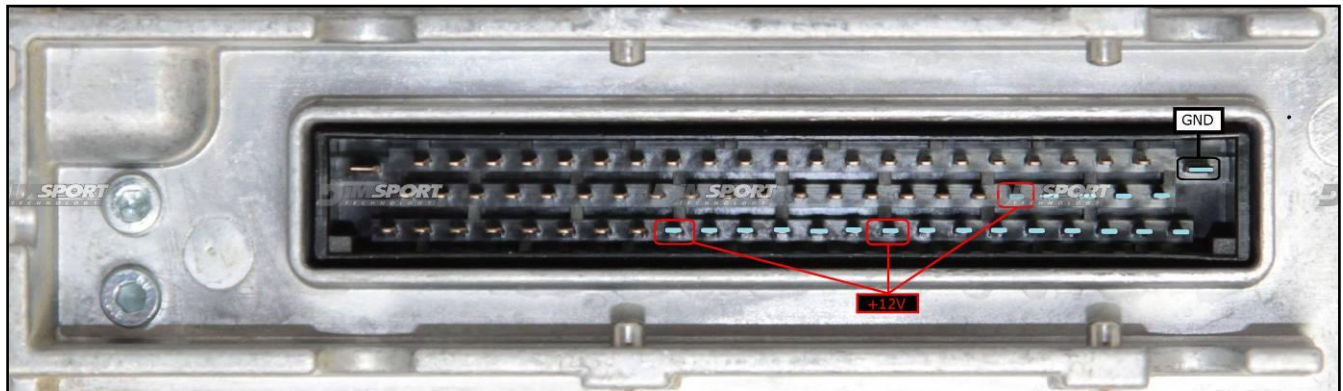


AGCO GEARBOX ST10F269 XROM FENDT

ECU CONNECTOR

In order to connect to the ECU use the CABLE F32GN037C/D.
Make sure that the POWER led (red) on Trasdata is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHITE	CAN HIGH	
GRIGIO GREY	POL4 BOOT	
BLU BLUE	POL5 CNF1	
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE	
MARRONE BROWN	RESET	



To power the ECU it is possible to use the VKEY wirings too, both red and orange wires are 12V.

AGCO GEARBOX ST10F269 XROM FENDT

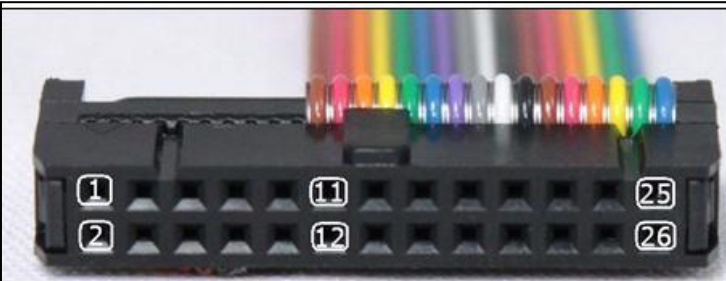
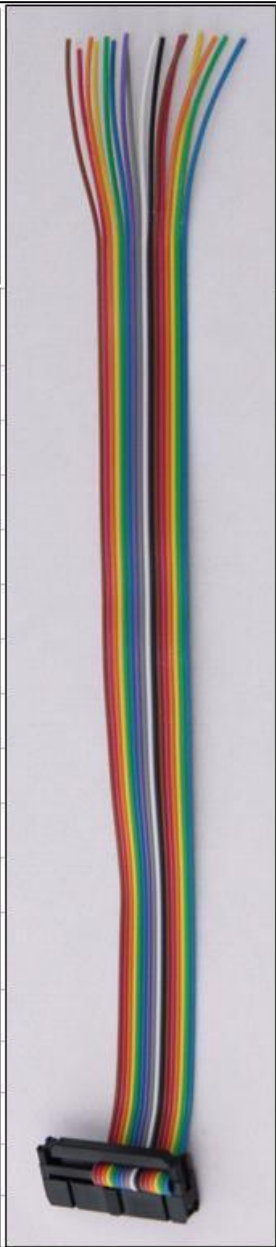
BOOT CONNECTION

Connect the GREY wire of the F32GN037C/D cable as shown here below:

COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

RX & TX CONNECTION

To connect the RX & TX communication lines use the F34NTF53 FLAT wiring

			
Pin	Colore Colour		
11	Non usato Not used		
12	Non usato Not used		
13	Non usato Not used		
14	Non usato Not used		
15	Non usato Not used		
16	Blu Blue		
17	Viola Violet		
18	Grigio Grey		
19	Bianco White		
20	Nero Black		
21	Marrone Brown		
22	Rosso Red		
23	Arancio Orange		
24	Giallo Yellow		
25	Verde Green		
26	Non usato Not used		

AGCO GEARBOX ST10F269 XROM FENDT

